

Landmark Lifts
Enclosed Goods Lifts –
Modular and customised



Landmark Lifts Enclosed Goods Lifts – All the way to the top

From the planning and concept stage to development and manufacture and all the way to the realisation of and ongoing support for optimally integrated complete solutions:

Landmark Lifts has been successfully getting the internal logistics of commercial, industrial and distribution companies moving all over the world since 1998.

For decades, Landmark Lifts' enclosed goods lifts have been one of the most successful products of our diverse service concept. Their proven technology and safety, along with their variable sizes and the simple configuration of the free-standing structure, make them a reliable and logical element between incoming goods, the warehouse and dispatch.

At a time when online mail-order business is placing greater demands on the internal flow of materials, demands on storage capacities and efficiency are likewise increasing. This is a trend that is set to continue. Companies that want to keep up with this trend rely on the efficient systems of Landmark Lifts – and on our enclosed goods lifts.





System advantages

- Four basic models for different requirements
- Individual manufacture thanks to the modular system
- Stable, free-standing frame structure
- Assembly involves no cutting and welding
- Retrofittable
- Short delivery time
- High reliability
- A large number of safety components
- Can be used down to -24°C

Landmark Lifts Enclosed Goods Lifts – Modular and customised

The Landmark Lifts range of enclosed goods lifts includes four models, thereby offering the right solution for every purpose and place of use. The free-standing frame structure requires only a load-bearing footprint. The safety stop mechanism also enables it to be installed above accessible rooms.

Flexible solutions in a modular system

Landmark Lifts' enclosed goods lifts can carry loads of up to 2000 kg.

The sturdy, free-standing frame structure takes up very little space and can be installed almost anywhere. It is also retrofittable. The modular system guarantees short delivery times and problem-free assembly on site. No complex cutting or welding work is involved.

Depending on the car size and the load-carrying capacity, the large models only require an access ramp or alternatively a floor pit.

Enclosed goods lifts are planned and manufactured specifically, according to what they are actually required for. There is also the possibility of custom solutions that take account of payloads and goods dimensions. Two to six stops with up to 12 entrances can be provided to a transport height in excess of 20 m.

The single-leaf or double-leaf landing doors – with or without a window – are manufactured in accordance with DIN 18090. These "simplified goods lifts" that comply with Machinery Directive 2006/42/EC.

The safety components of enclosed goods lifts allow installation above accessible rooms. It goes without saying that even the basic features include a safety stop mechanism with a drop guard and overload protection. The package is completed by light barriers within the car, a car roof configured as a safety grille and an emergency intercom. The lift is operated from the outside by a call and send controller. Landmark Lifts enclosed goods lifts are available powder-coated in all RAL colours as standard. In other words: They can be made to match the company colour scheme for no extra charge.



Landmark Lifts Type 16

Technical features

Transport height to over 20,000 mm, special heights possible


Car doors approved in acc. with DIN 18090 as fire barriers

Drive can be installed on the right, left or at centre depending on configuration

Doors in various versions

RAL colours powder-coated as standard

Lift can be used indoors or outdoors, optionally to -24 °C Special sizes on request



Plan view


Landmark Lifts Enclosed Goods Lifts

The Landmark Lifts Type 16 is a modular goods lift for indoor and outdoor use that can carry loads of up to 2000 kg and that can be retrofitted almost anywhere with very little complexity. A time-saving and cost-effective solution even before you start.

Custom solutions

Thanks to its compact design, the frame structure of the Landmark Lifts Type 16 is extremely space-saving and allows up 2 to 6 stops with up to 12 entrances. The single-leaf or double-leaf landing doors are available in both mechanical and automatic versions.

A floor pit or an access ramp is required depending on the payload. The configuration of the Landmark Lifts Type 16 enclosed goods lift is versatile thanks to the variation of the modules. This allows a whole host of special solutions to be realised with ease. The goods lift is marketed in accordance with the machinery directive 2006/42/EC. The specified regular inspections in line with the relevant health & safety laws can be done by a Landmark Lifts specialist as part of the regular maintenance work and without having to involve the Technical Inspectorate.

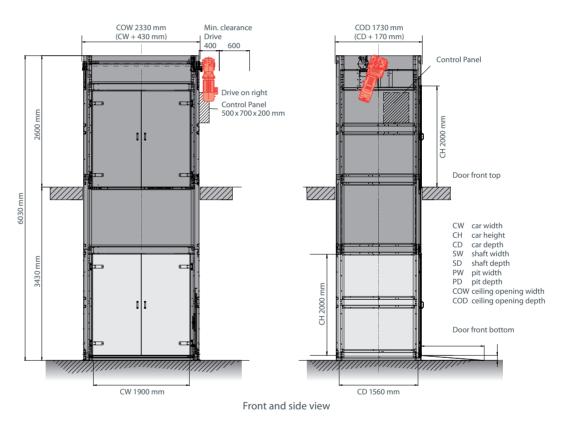

Landmark Lifts Enclosed Goods Lifts The lift with an attendant*

Landmark Lifts Type 17

Control also from the inside

The Landmark Lifts Type 17 is a special version of the proven Type 16. Within the car there is a manual control with a key-operated switch that deactivates the external controller. This goods lift allows the load to be accompanied by a suitably trained operative.

*An advantage that saves both time and unnecessary walking.

Tested safety

The Landmark Lifts Type 17 has been EC type-tested in accordance with the machinery directive 2006/42/ EC Annex IX by the Technical Inspectorate (TÜV) in Munich, and carries the type test certificate number EC-MRL 009. It comes with many safety features, and it is also possible for these to include special customer requirements such as emergency intercoms.

Technical features

- Numerous safety components
- Landing doors in acc. with DIN 18090 approved as fire barriers
- Optionally with energy-saving LED lighting
- Lift can be used indoors or outdoors, optionally to -24 °C

Landmark Lifts Enclosed Goods Lifts

The Landmark Lifts Type 18 goods lift is particularly suitable for integration into the fabric of existing buildings, e.g. as part of a renovation. Thanks to complete installation from the inside outwards, it offers great advantages when expanding lift shafts or for installation directly on building walls. The low shaft headroom and the possibility of not needing a shaft pit are particularly helpful.

Like the models 16 and 17, the Type 18 is a free-standing frame structure. It complies with the machinery directive 2006/42/EC and does not require Technical Inspectorate approval.

Repeat inspections in line with health & safety laws are carried out by Landmark Lifts experts as part of the normal maintenance. Weather-resistant cladding is available as a special feature for outdoor installation.



Landmark Lifts Type 18

Data			
	Type 16	Type 17	Type 18
Operating speed (m/s) *	0.18	0.15	0.15
max. travel height (mm) **	20,000	20,000	20,000
Car dimensions ***			
Car width (mm)	1000-2800	1200-2800	800-2200
Car depth (mm)	1060-2860	1060-2860	1080-2480
Car height (mm)	1800-3000	2000-2800	1800-2200
Load Capacity (kg)	2,000	2,000	2,000

^{*} Faster or controlled elevation speeds on request

^{**} Special transport heights on request

^{***} Special sizes on request







Landmark Lifts 🖳

Landmark Lifts, 29 Charter Gate, Quarry Park Close, Moulton Park, Northampton, NN3 6QB, United Kingdom t: 01604 671007 f: 01604 671017 e: info@landmarklifts.co.uk w: www.landmarklifts.co.uk

Landmark Lifts is a trading name of N L C Nova Lift Co. Limited, a private limited company registered in England and Wales with company number 03423173 whose registered office address is Nova House, 162 Pratling Street, Aylesford, Kent, ME20 7DH. VAT No: 725 5204 53